






TAYA GROUP
大亞集團

TAYA (VIET NAM) ELECTRIC WIRE & CABLE CO., LTD

CÔNG TY CỔ PHẦN DÂY & CÁP ĐIỆN TAYA (VIỆT NAM)

Frame size(AF)		100		125		160		250		400		630		800		
Type		TVM1-100		TVM1-125		TVM1-160		TVM1-250		TVM1-400		TVM1-630		TVM1-800		
Number of Poles		3	4	3	4	3	4	3	4	3	4	3	4	3	4	
Rated current(A) At ambient temperature		10 15 20 32 40 50 63 75 100		10 15 20 32 40 50 63 75 100 125		125 150 160		125 150 175 200 225 250		250 300 350 400		400 500 630		630 700 800		
Price List (VND)		700,000		900,000		1,300,000		1,400,000		3,700,000		7,000,000		8,800,000		
Rated insulation voltage(V) CNS,IEC		AC 800														
Rated breaking capacity(KA)		AC 1000														
IEC 60947-2 AC 380V		35/21		35/21		50/35		50/35		50/35		65/42		65/42		
EN 60947-2 AC 220V		50/35		50/35		70/50		70/50		85/60		100/65		100/65		
Dimensions(mm)		a	76	76	107	107	150	182	210							
	b	130	130	165	165	257	270	280								
	c	66	66	75	75	105	110	106								
	d	83	83	95	95	115	160	145								
	aa	25	25	35	35	44	58	70								
	bb	110	110	125	125	194	200	243								
	Features															
Automatic tripping device		Fixed-thermal				Fixed-thermal and fixed-magnetic				Fixed-thermal and adjustable magnetic						
Trip button		●				●				●				●		
ON / OFF Indicator		—				—				—				—		
Accessories (include)																
	Insulation rubber	IR	●				●				●				●	
	Allen wrench	AW	●				●				●				●	
Accessories (option)																
Internally mounted	Shunt trip	SHT	●				●				●				●	
	Under voltage trip	UVT	—				—				—				—	
	Auxiliary switch	AUX	●				●				●				●	
	Alarm switch	ALT	●				●				●				●	
	Alarm + Auxiliary switch	AUX+ALT	●				●				●				●	
Externally mounted	Electrical operation mechanics	CD	●				●				●				—	
	External operating handle	FH	—				—				—				●	
		FL	—				●				●				●	
		FG	—				●				●				—	
		TFJ	—				—				—				●	
	Extension handle	EHA	—				—				—				●	
	Attached flat bar	TBB	—				—				—				●	
	Interpole barrier	TQQ	●				●				●				●	
	Terminal cover	XPR	●				●				●				—	

note : ● Available - Not Available

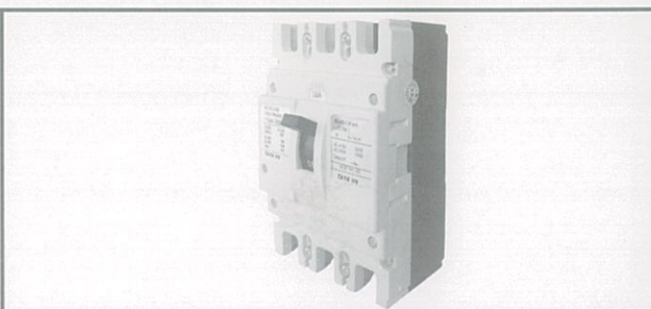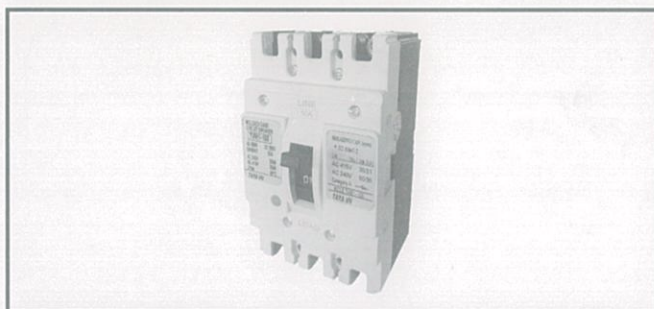

Working Environment

1. Altitude < 2000m
2. Ambient temperature: +40°C (+45°C for ships) ~ -5°C.
3. Resistance to salt spray and oil spray
4. Resistance to mould
5. Resistance to moisture
6. Resistance to nuclear radiation
7. Reliable work under earthquake condition (4g)

Remark: This product is designed specific for South East Asia

Products Features:


1. Miniaturization
2. High capacity
3. Safety
4. Economic
5. Environment friendly



TAYA GROUP
大亞集團

TAYA (VIET NAM) ELECTRIC WIRE & CABLE CO., LTD

CÔNG TY CỔ PHẦN DÂY & CÁP ĐIỆN TAYA (VIỆT NAM)

Frame size (AF)		1000	1250	1600
Type		TVM1-1000	TVM1-1250	TVM1-1600
Number of Poles		3	3	3
Rated current (A) At ambient temperature		800 1000	1000 1250	1600
Price List (VND)		20,600,000	24,600,000	33,300,000
Rated insulation voltage (V) CNS,IEC		AC 1000		
Rated breaking capacity (KA)				
IEC 60947-2 AC 380V		85/43	85/43	100/50
EN 60947-2 AC 220V		100/50	100/50	125/63
	Dimensions (mm)	a	210	210
	b	330	330	330
	c	138	138	138
	d	190	190	190
	aa	—	—	—
	bb	—	—	—
Features				
Automatic tripping device		Fixed-thermal	Fixed-thermal and fixed-magnetic	Fixed-thermal and adjustable magnetic
Trip button		—	—	—
ON / OFF Indicator		—	—	—
Accessories (include)				
	Insulation rubber	IR	●	●
	Allen wrench	AW	●	●
Accessories (option)				
Internally mounted	Shunt trip	SHT	●	●
	Under voltage trip	UVT	—	—
	Auxiliary switch	AUX	●	●
	Alarm switch	ALT	●	●
	Alarm + Auxiliary switch	AUX+ALT	●	●
Externally mounted	Electrical operation mechanics	CD	●	●
	External operating handle	FH	—	—
		FL	—	—
		FG	—	—
		TFJ	—	—
	Extension handle	EHA	●	●
	Attached flat bar	TBB	●	●
	Interpole barrier	TQQ	●	●
	Terminal cover	XPR	—	—

note : ● Available - Not Available

Working Environment

- Altitude < 2000m
- Ambient temperature: +40°C (+45°C for ships) ~ -5°C.
- Resistance to salt spray and oil spray
- Resistance to mould
- Resistance to moisture
- Resistance to nuclear radiation
- Reliable work under earthquake condition (4g)

MAIN PRODUCTS:

HẠ THẾ, TRUNG THẾ, CHỐNG CHÁY, DÂY ĐIỆN TỬ, CẦU DAO

LOW VOLTAGE CABLE · MEDIUM VOLTAGE CABLE · FIRE RESISTANT · MAGNET WIRE
SB · RCCB · MCB · MCCB

HEAD OFFICE:

SỐ 1, ĐƯỜNG 1A, KHU CN BIÊN HÒA II, ĐỒNG NAI, VIỆT NAM

NO.1 1A STREET, BIEN HOA II INDUSTRIAL ZONE, DONG NAI PROVINCE, VIET NAM

TEL: 0251-3836361

FAX: 0251-3836388

E-mail: vndnsale@mail.taya.com.tw

GHI CHÚ:

Sản phẩm sản xuất theo tiêu chuẩn IEC, được Quatest 3 kiểm nghiệm đạt chất lượng và cấp giấy chứng nhận.



WEBSITE:

www.taya.com.vn

HCMC OFFICE:

135/17/25-27, NGUYỄN HỮU CẢNH, P.22, QUẬN BÌNH THẠNH, TP HỒ CHÍ MINH

NO.135/17/25-27, NGUYEN HUU CANH STREET, PHUONG 22, DISTRICT BINH THANH, HCMC

TEL: 028-35128861 FAX: 028-35128790

E-mail: vntx@mail.taya.com.tw



GIẢI VÀNG CHẤT LƯỢNG
QUỐC GIA NĂM 2013
NATIONAL GOLD QUALITY AWARD 2013